



Bulldog Roofing & Repair

Prepared For:

**Louis Crosby
1003 7th Tee Vista
San Antonio, TX
78221**

HailStrike
 4011 W Plano Pkwy
 Suite #105
 Plano, TX 75093



To order additional OneSite reports, visit our website at <http://onesitereport.com> or give us a call at

support@hailstrike.com

(972) 638-7225

Report No. 17223

Property Owner Information

Property Owner: **Louis Crosby**
 Address: **1003 7th Tee Vista**
 City: **San Antonio**
 State: **TX**
 Zip: **78221**
 Phone: **(219) 555-1212**

Report Information

Report Date: **11-22-2017**
 Ins. Carrier: **Great USA Protection**
 Claim No: **us-128733h**
 Subdivision: **Whiffletree**

Storm Detail

Date: **05-23-2017 3:30 PM** *Duration: **00:04** Est. Max Hail Size: **1.75"**
 Max Intensity: **10.0** Storm Speed: **37 MPH** Storm Direction: **SE**

* Duration refers to the time the storm was over the point, rather than the overall length of the storm.



Property Information

Est Value: Property Age: **12** Elevation: **579 ft**
 County: **Bexar** Roof Age: **4** Roof Type: **Comp-3Tab**



Historical Storm Activity At Location

Elevation: **579 ft**

Lat: **29.3033** Lon: **-98.4804**

All times in the America/Chicago time zone

Date of Storm	Duration (h:m)	Est. Max Hail Size	Intensity	Station ID	Storm Speed (MPH)	Storm Direction
05-30-2017	00:04	1.00"	5.5	KDFX	13	SE
05-23-2017	00:04	1.75"	6.5	KDFX	34	SE
05-23-2017	00:04	1.75"	10.0	KEWX	37	SE
05-23-2017	00:04	1.75"	4.5	KGRK	54	ESE
03-29-2017	00:04	1.00"	4.5	KCRP	60	NE
05-17-2016	00:08	1.25"	4.5	KGRK	15	E
05-17-2016	00:04	1.25"	4.5	KCRP	16	SE
04-27-2016	00:04	1.00"	3.5	KCRP	43	E
03-09-2016	00:04	1.25"	5.5	KCRP	32	NNE
04-24-2015	00:04	1.00"	3.5	KCRP	40	E
05-27-2014	00:04	1.25"	7.5	KDFX	21	SSE
04-14-2014	00:04	1.00"	4.5	KDFX	38	E
05-10-2013	00:04	1.75"	4.5	KCRP	37	ESE
05-10-2013	00:08	1.25"	5.5	KCRP	49	ESE
05-09-2013	00:04	1.25"	3.5	KDFX	25	ESE

HailStrike
4011 W Plano Pkwy
Suite #105
Plano, TX 75093



To order additional OneSite reports, visit our website at <http://onesitereport.com> or give us a call at

support@hailstrike.com

(972) 638-7225

05-31-2012	00:04	0.50"	4.5	KEWX	23	ESE
01-24-2012	00:20	1"	5.5	KCRP	15	ENE
01-24-2012	00:04	1"	4.5	KEWX	48	ENE
10-08-2011	00:08	1.00"	3.5	KGRK	58	SSE
05-12-2011	00:04	1.00"	3.5	KEWX	12	NE

Stations considered in creating this OneSite: KEWX KDFX KGRK KCRP

Comprehensive data has been used to assemble this report, including several unique calculations and patented technology to completely detail the storm area affected. We accumulate and compile reporting data from various sources including, but not limited to: National Weather Service ("NWS"), the Storm Prediction Center ("SPC"), the National Climatic Data Center ("NCDC"), internet sources, and other credible resources.

For any further definition of the technology used in this report, please contact the offices of Dynamic Weather Solutions directly. By ordering or otherwise utilizing this report the user agrees to abide by our terms and conditions as outlined in our license agreement which can be found online at onesitereport.com/EULA

Our patented Derived Hail Index (DHI) produces a colorized graph similar to a heat map. However, rather than temperatures, its differing colors represent the storms' varying severe hail intensities. The "Intensity Scale" to the side of the image shows darker purple colors representing lower intensity of severe hail, while the yellow and higher white colors depict higher intensities. The DHI calculation is comprised of not only the size, but also the amount of hail activity. This high definition data comes directly from the network of 160 NEXRAD WSR-88D radars using dual polarization technologies across the continental United States. The round colored markers represent the maximum hail size at that point.



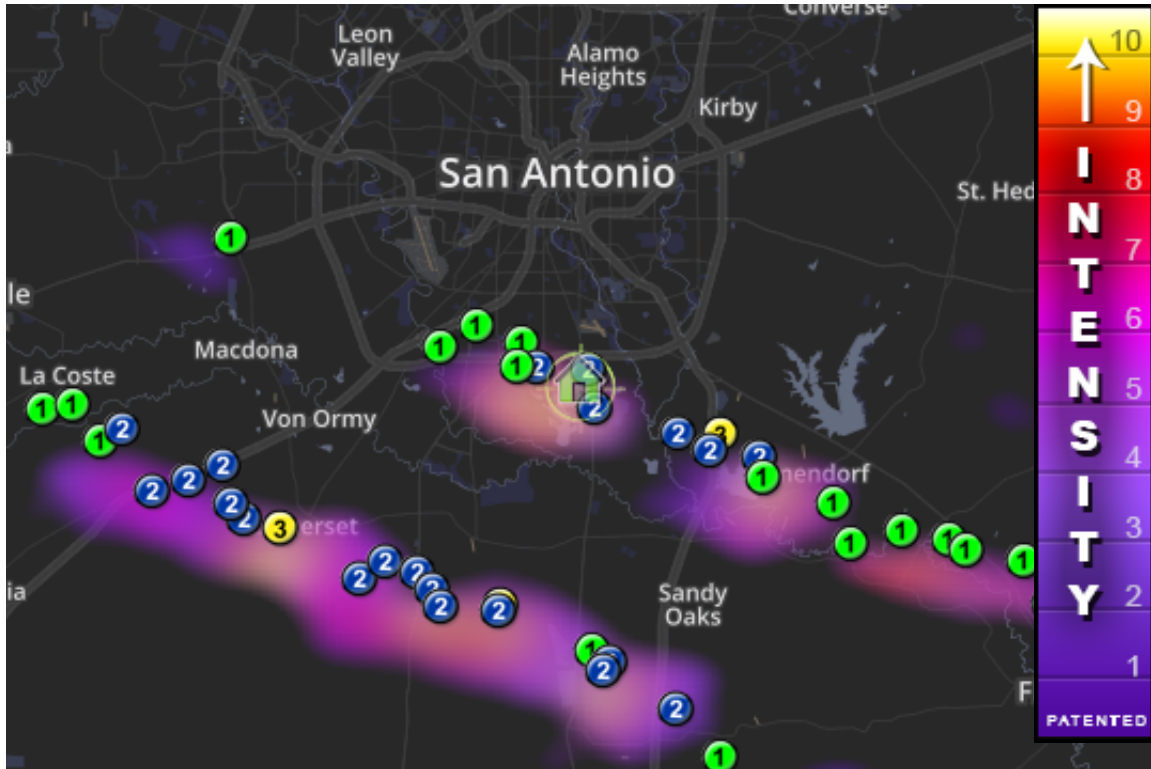


Image: Swath Detail at ~ 30 X 45 miles out


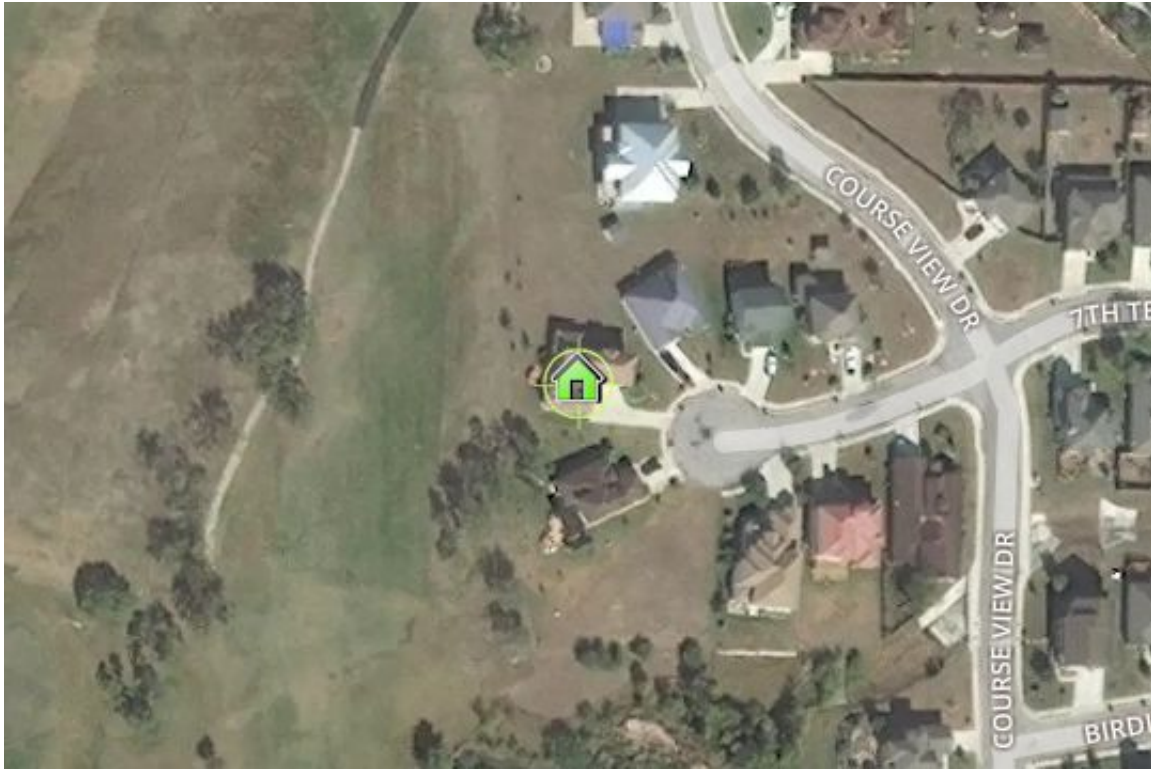


OneSite accesses information from Geographic Information Systems (GIS) and aerial photography databases to accurately pinpoint the exact location of the asset being analyzed. OneSite uses this detailed satellite imagery, maintained by the United States Geological Survey (USGS), to verify correct location (Latitude and Longitude.) The small house icon centered on the map above represents the exact location.

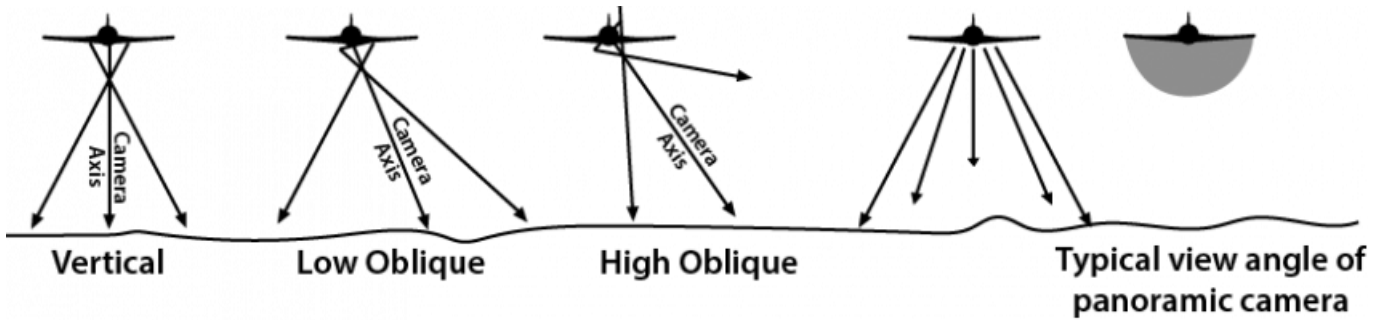

Wind speed, direction and gusts play a big part in determining where hail stones make land strike. Within a super cell, wind may vary in direction and speed at several levels throughout the storm cloud. We calculate the storm's overall direction as it was affected by the wind.

THIS STORM WAS HEADED: **South East**

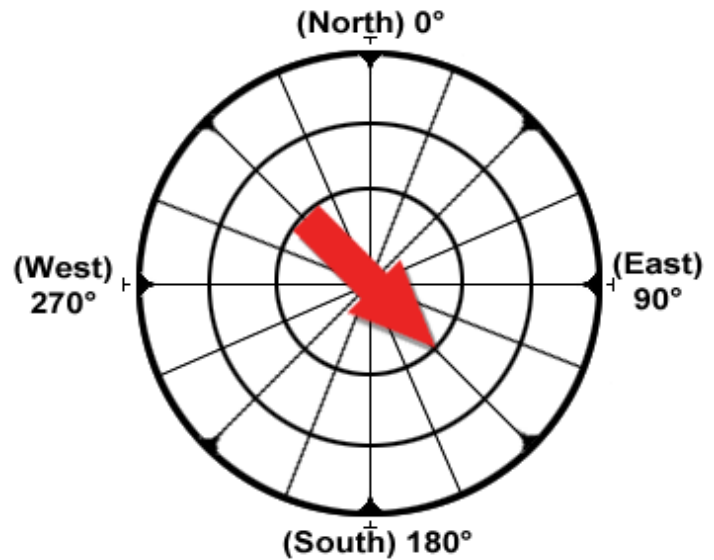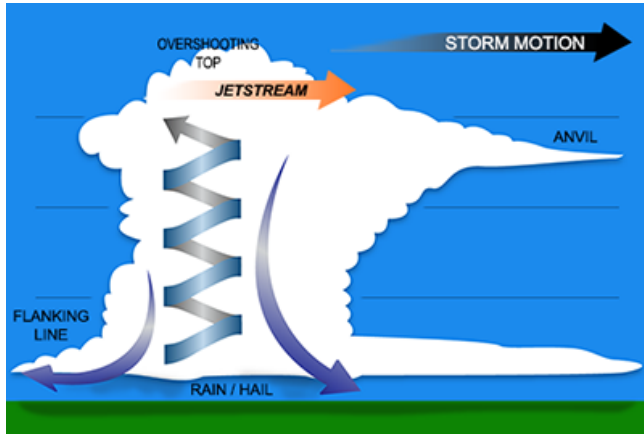

Beaufort No.	Description	Wind	Land Conditions
0	Calm	< 1	Calm, smoke rises vertically
1	Light air	1-2	Wind motion visible in smoke
2	Light breeze	3-6	Wind felt on exposed skin. Leaves rustle.
3	Gentle breeze	7-10	Leaves and smaller twigs in constant motion.
4	Moderate breeze	11-15	Dust and loose paper raised. Small branches begin to move.
5	Fresh breeze	16-20	Branches of a moderate size move. Small trees begin to sway
6	Strong breeze	21-26	Large branches in motion. Whistling heard in overhead wires.
7	High Wind, Gale	27-33	Whole trees in motion. Effort needed to walk against the wind.
8	Fresh gale	34-40	Some twigs broken from trees. Cars veer on road.
9	Strong gale	41-47	Some branches break off trees, and some small trees blow over.
10	Whole gale	48-55	Trees are broken off or uprooted, saplings bent and deformed.
11	Violent storm	56-63	Widespread vegetable damage. Many roofing surfaces are damaged.
12	Hurricane	> 64	Very widespread damage to vegetation. Some windows may break.

Terminology and Technology

Intensity Scale - The Report's most complex calculation, this scale is based on several data products directly extracted from the NEXRAD radar system. Its high definition values utilize the latest in Dual Polarization technology to calculate our patented algorithm, producing a scale with values from 1 (minimum affect) to 10 (greatest affect). Calculations are based on a complex formula that examines Level III data including a proprietary cross-referencing of radar "products" that the antennas generate approximately every 4-5 minutes (the time for a completed 360 degree rotation of the dish, depending on which scan mode is selected.)

The calculated intensity of a storm refers to the overall force of hail activity produced by a hail cell. Lower registers indicate lesser impact of hailstones, whereas upper registers in the 8-10 (red-white) represent much higher strength. Maximum intensity is the highest strength hail produced over the area selected by the user. Data is measured at the lowest elevation angle possible of 0.6 degrees with a maximum range of 225 nm.


Storm Speed - This value refers to the speed of the overall storm itself. This should not be confused with wind speed or gusts in or around the cell itself.

Max Hail Size - The complex effects of rain, humidity, wind, melt zones and storm-cloud height (not to mention radar's basic physical limitations as seen on the Technology Page's Radar Elevation angles), makes it difficult to accurately portray the size of hailstones as they hit the ground. This size calculation is a result of processing by the radar's internal software, after which the data is harvested by the array of data servers maintained by HailStrike. Then the collected data is used to generate the intensity scale which this OneSite report references.

Duration - This is calculated from the time the storm develops in or near the area, until the storm has passed or is no longer affecting the area. Several additional factors are being considered at this time; such as its overall size, speed, and intensity. A lower strength storm will not register once it falls below a specified threshold even if the storm continues in its weaker state.

Storm Direction - The red arrow within the compass displays the direction the storm travelled. This is not the wind direction, as wind can blow virtually in any direction as the storm moves from point to point.

HailStrike uses Level III NEXRAD radar data from NOAA to plot a series of markers (path points) which represent significant activity within super cell storm clouds containing hail signatures. Each marker has a numerical designation which shows the approximated maximum size of the hail stones that is expected to have hit the ground at or near the marker. The maximum size of hail is a probabilistic result of several factors which are calculated together by NOAA.

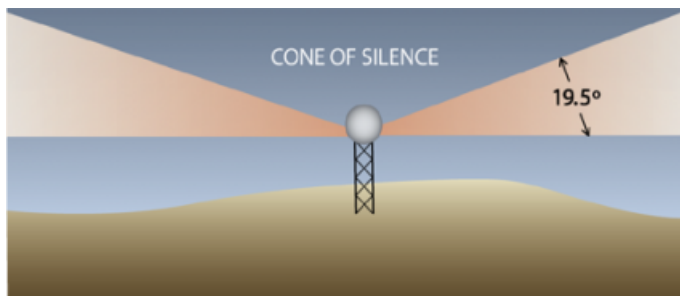


The weather radar you see on your local TV news or The Weather Channel is Doppler radar. Doppler radar emits beams (pulses) of microwave energy from a transmitter into the atmosphere. When these beams collide with objects in the atmosphere such as raindrops or hail stones, some of that energy bounces back towards the radar. A receiver on the radar then displays the data in different ways. Doppler radar came into common use when the Weather Surveillance Radar – 1988 Doppler radar (WSR-88D) was installed. Currently, over 160 such WSR-88Ds operate around the United States

and other U.S. territories. They are part of a network of Doppler radars called NEXRAD, which stands for NEXt generation RADar. All radar sites in the lower 48 U.S. states are given a four-letter call number starting with "K."

When you see a radar image on TV, you are likely looking at a combination of individual Doppler radars or a section of the NEXRAD network. Why is this? An individual radar sits inside a dome resting on a tower almost 100 feet in the air. As the transmitter on the radar emits beams of microwave energy, it also rotates in all horizontal directions and sends energy to every part of the lower atmosphere. Given the analog structure of the radar, beams can only be transmitted to a certain distance. HailStrike disregards the scan's farther extremities, as it is largely unreliable or innaccurate data. All data is measured at the lowest elevation angle possible of 0.6 degrees with a maximum range of 225 nm.

Terminology and Technology


RADAR SCAN RADIAL SWEEPS

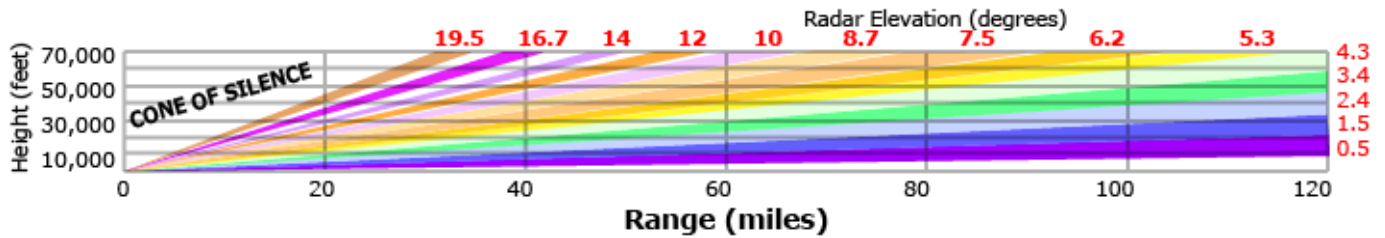

NEXRAD radars emit a powerful linear beam from their dome-shaped housing, but the beam's direction cannot be totally vertical—therefore producing what is known as a “Cone of Silence.” This Cone is commonly observed when looking at a single radar station's data. However, the cone can be “filled in” by using a neighboring station's data to provide a complete picture of the storm cell.

HailStrike has taken advantage of recent upgrades which NOAA (National Oceanic Atmospheric Administration) has performed on all of their NEXRAD radar stations —referred to as “Dual Polarization.” In essence, the modification (both hardware and software) has doubled the radars' resolution and vastly increased its number of monitored data points. HailStrike collects and stores all of this information, allowing our users to display, filter, and perform reports based on this data.

NEXRAD RADAR USED FOR THIS REPORT: **KEWX**

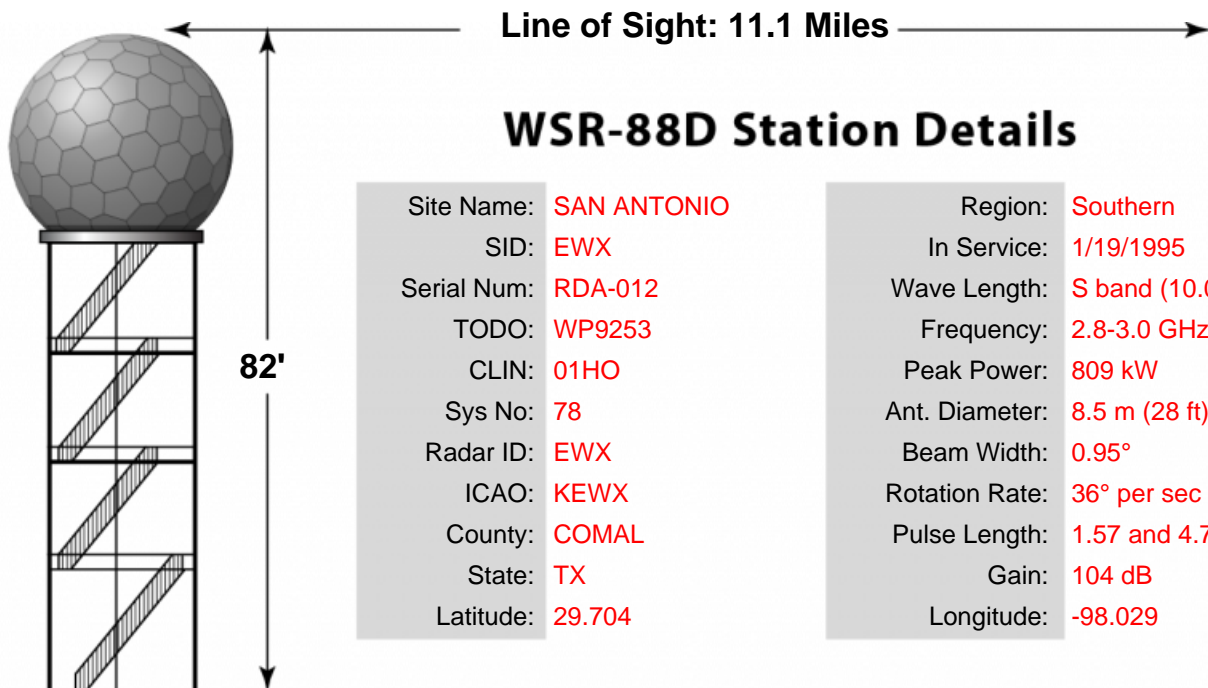

WSR-88D Station Details


Site Name:	SAN ANTONIO	Region:	Southern
SID:	EWX	In Service:	1/19/1995
Serial Num:	RDA-012	Wave Length:	S band (10.0-11.1 cm)
TODD:	WP9253	Frequency:	2.8-3.0 GHz
CLIN:	01HO	Peak Power:	809 kW
Sys No:	78	Ant. Diameter:	8.5 m (28 ft)
Radar ID:	EWX	Beam Width:	0.95°
ICAO:	KEWX	Rotation Rate:	36° per sec
County:	COMAL	Pulse Length:	1.57 and 4.7 micro sec
State:	TX	Gain:	104 dB
Latitude:	29.704	Longitude:	-98.029

Elevation: 669'

Other reporting stations considered: KDFX, KGRK, KCRP

NEXRAD or Nexrad (Next-Generation Radar) is a network of 160 high-resolution S-band Doppler weather radars operated by three federal entities—the National Weather Service (an agency of the National Oceanic and Atmospheric Administration, or NOAA, within the United States Department of Commerce), the Federal Aviation Administration within the Department of Transportation, and the US Air Force within the Department of Defense.


NEXRAD's technical name is WSR-88D, which stands for Weather Surveillance Radar, 1988, Doppler. NEXRAD detects precipitation and atmospheric movement, or wind. It returns data, which after processing can be displayed in a mosaic map showing patterns of precipitation and movement. The radar system operates in two basic modes, selectable by the operator: a slow-scanning, clear-air mode for analyzing air movements when there is little or no activity in the area, and a precipitation mode with a faster scan for tracking active weather. NEXRAD places an increased emphasis on automation, including the use of algorithms and automated volume scans.

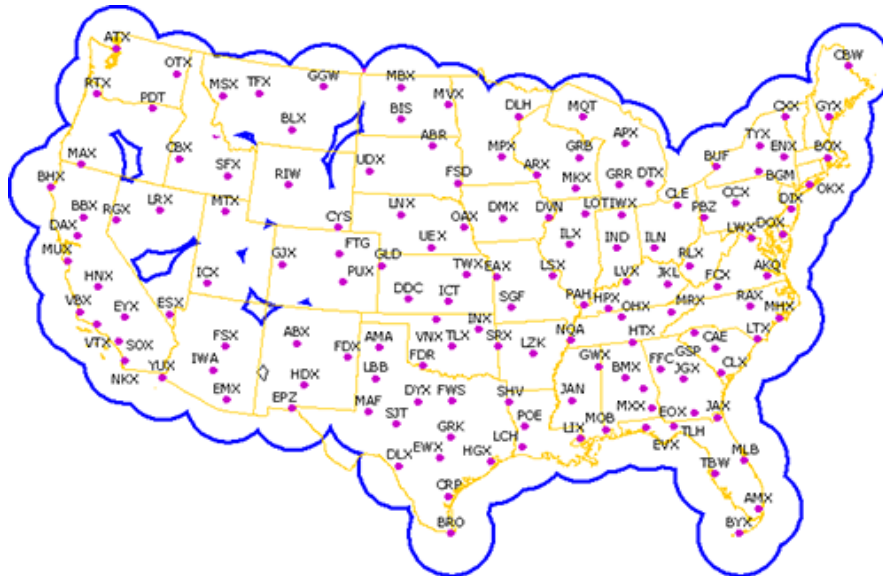

NEXRAD data is used in multiple ways. It is used by National Weather Service meteorologists and is freely available to users outside of the NWS, including researchers, media and private citizens. The primary goal of NEXRAD data collection is to aid NWS meteorologists in operational forecasting. The data allows them to accurately track precipitation and anticipate its development. More importantly, it allows the meteorologists to track severe weather and tornadoes. Combined with ground reports, tornado and severe thunderstorm warnings can be issued to alert the public about dangerous storms.

NEXRAD data also provides information about rainfall rate and aids in hydrology forecasting. Data is provided to the public in several different forms. The most basic form is graphics published to the NWS website. Data is also available in two similar, but different, raw formats. Level III data is available directly from the NWS. It consists of reduced resolution, low-bandwidth, base products as well as many derived products. Level II data consists of only the base products, but at their original resolution. Because of the higher bandwidth costs, Level II data is not available directly from the NWS. The NWS distributes this data freely to several top-tier universities, who in turn distribute the data to private organizations.

Dual polarization - WSR-88D sites across the nation were recently upgraded to polarimetric radar, which adds vertical polarization to the previous horizontal radar waves to more accurately identify what is reflecting the signal. This so-called **dual polarization** allows the radar to distinguish between rain, hail and snow, something horizontally polarized radars could not accurately do. Early trials proved that rain, ice pellets, snow, hail, birds, insects, and ground clutter all have different signatures with dual-polarization. This will mark a significant improvement in identifying severe thunderstorms.

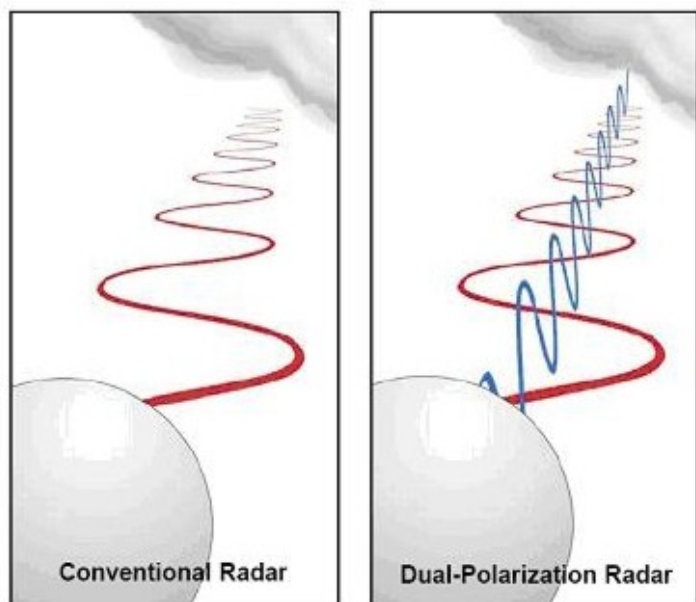



About Us



Report Date: 11-22-2017

Report Number: 17223

The most Preferred solution for comprehensive and accurate weather forensics.

HailStrike is an advanced weather forensics company offering the industries only patented and cross-referenced historical data available in the market today. Founded in 2011 and operating under the Dynamic Weather Solutions umbrella, HailStrike has forged a radically fresh approach to weather forensics. We design tools with the user in mind rather than simply "data-dump" our clients with information that is often hard-to-use, vague and inaccurate. This priority on clients' ease-of-use makes our data both productive and easily understood.

HailStrike is located in the Dallas, Texas area, which experiences some of the United States' most severe weather. This location offers us frequent opportunities to verify the accuracy of our reporting software and its complex calculations. We frequently have the opportunity to deploy one of our staff Storm Spotters or weather chasers to physically track a storm using one or more of HailStrike's tools. Not only does this verify the accuracy of a particular report, but it helps refine our data and ensures that our ever-improving accuracy remains second to none.

OneSite reports are fast becoming acknowledged as valid representations of storm activity. We do not limit our report to the hail's size relative to a location, or wind's "gust speed". Our Reports equip you with every available detail about a storm at a precise location—leaving you with valuable data to support your claim. Whether you need data on a particular location, or even long-term historical comparisons, HailStrike provides the investigative, cross-referenced information needed to precisely document activity. When it is critical that you have all the facts available, HailStrike stands alone.

Our development team does not rest on its laurels as an industry pioneer, but constantly strives to refine our inventive tools based on state-of-the-art data sources. HailStrike's speed of reporting has quickly gained an unrivaled reputation. Generally, our timely reports are generated within just a few hours and sometimes even real time— saving you the added expense of "rush" services. With comprehensive tools, services and the only U.S. patented algorithm, HailStrike provides the data without the need to piece together reports from information spread across multiple, non-integrated resources.



Disclaimer



Report Date: 11-22-2017

Report Number: 17223

Dynamic Weather Solutions, Inc. ("DWS") accumulates and compiles reporting data from various sources including, but not limited to: National Weather Service ("NWS"), the Storm Prediction Center ("SPC"), the National Climatic Data Center ("NCDC"), internet sources, and live witness resources. This report and the reports we provide (the "Content") represent the most accurate representation for storm activity based upon such resources. Although extra steps have been taken to ensure the accuracy of these reports, we cannot guarantee the absolute accuracy of the information being provided, nor can we be held responsible for inaccurate data that we receive, including errors in the reporting sources, the sources' equipment, or the accuracy of their information. DWS specifically disclaims all warranties, express or implied, including without limitation the warranties of merchantability, fitness for a particular purpose, and non-infringement with respect to the Content. In no event will DWS be liable for any general, special, indirect, incidental or consequential damages, even if DWS has been advised of the possibility of such damages.

All information and Content is subject to change without notice. Reasonable efforts have been taken to ensure the accuracy and integrity of all information provided, but DWS is not responsible for misprints, out-of-date information, or errors. DWS provides the Content on an "as is" basis and makes no representation or warranties, express or implied, concerning the accuracy, reliability, timeliness, completeness, or suitability of the Content, including any other material which is expressed, referenced, linked or connected thereto.

DWS is not responsible for any of the following technical malfunction: inability to access the Content; failures, omissions, interruptions, deletions or defects in any data systems or networks; computer online systems; computer equipment; server providers or software; including any injury or damage to User's, or any other person's, computer or system, relating to or resulting from any use of the Content.

All rights to the Content are expressly reserved by DWS and/or the respective legal owners of such information, including, without limitation, copyright, trademark, patent and/or service mark rights. By accessing and utilizing the Content, the user does not acquire any legal rights whatsoever to such information. The Content may also contain information that is proprietary and/or confidential and users may not reproduce, publish and/or distribute such information without the express written consent of DWS. As such, copies, reproduction, redistribution, dissemination, including, without limitation, screen captures, printed copies, photos, or sharing of login information to access data are strictly prohibited.

Contact Dynamic Weather Solutions should you require further explanation of your rights and limitation or contact us with further questions at info@hailstrike.com. User's access and use of the Content constitutes User's acceptance of the terms and conditions contained herein and any Terms of Use and/or Privacy Policy related to the Content.

Dynamic Weather Solutions

4011 West Plano Parkway
Plano, Texas 75093
United States
tel: (972) 638-7225
fax: (972) 596-1118
info@hailstrike.com

VERIFY THIS REPORT

6F9krquU

Enter this code at:
hailstrike.com/verify

Property value estimates
provided by Zillow.



Army Spc. Joseph V. White

*"Greater love has no one other than this,
that he lay down his life for his friends." (John 15:13)*



Died September 24, 2009 Serving During Operation Enduring Freedom

Age 21, of Bellevue, Wash., assigned to the 4th Battalion, 23rd Infantry Regiment, 5th Stryker Brigade Combat Team, 2nd Infantry Division, Fort Lewis, Wash., died Sept. 24 in Omar Zai, Afghanistan, of wounds suffered when enemy forces attacked his vehicle with an IED.



The brave men and women who have made the ultimate sacrifice to preserve liberty for all Americans must never be forgotten. A portion of the proceeds from this report will be donated to the Boot Campaign (www.bootcampaign.com) which is dedicated to promoting patriotism for America and our military community; raising awareness of the unique challenges service members face during service and post-service; and providing assistance to military personnel, past and present, and their families. HailStrike is committed to "those who gave all" by preserving their memory and heroic deeds.